


Features


- Semi-Sealed Construction
- Miniature Power Relay Ideal for Motor Switching in Appliances and HVAC Equipment

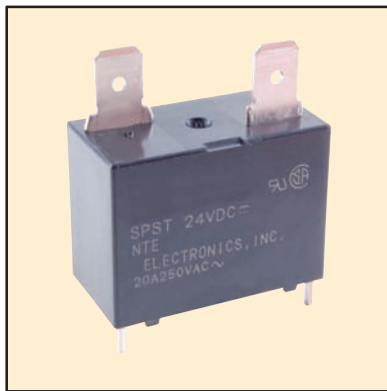

SPST-NO, 1 Form "A"

Tab Terminals
(Top View)

PCB Terminals
(Bottom View)

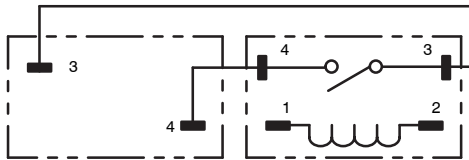

DC OPERATED


NTE Type No.	Nom. Voltage	Contact Arr.	Coil Res. Ohms (Typ)	Nom. Power	Max. Contact Cur. @ 250VAC	Diag No.
R71-1D20-5	5VDC	SPST-NO	27	900mW	20A	D84
R71-1D20-12	12VDC	SPST-NO	160	900mW	20A	D84
R71-1D20-24	24VDC	SPST-NO	640	900mW	20A	D84

R71 Series



Miniature, Semi-Sealed, 20 Amp, SPST-NO, DC Power, Printed Circuit Mount w/Quick Connect Relays for High Inrush Compressor Loads

D84

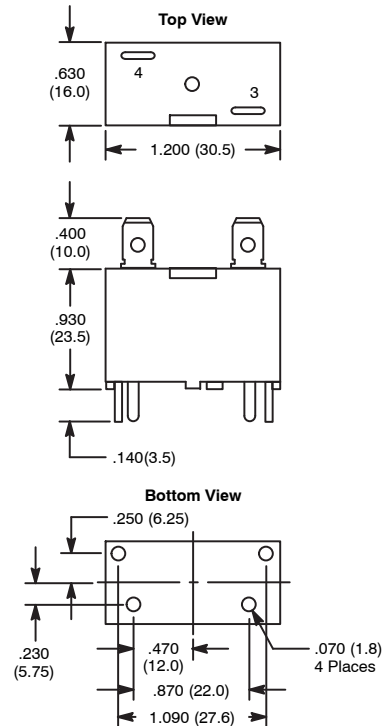

Electrical Specifications

Contact

Rating: Inrush 80 Amp (cos ϕ 0.7) 0.35/20 Amp steady state (cos ϕ 0.9)

Carry Current: 20 Amp

Contact Material: AgSnO₂

Contact Resistance: 0.1 Ohms Max. initial

Coil

Coil Voltages: See Chart

Pick-Up Voltage: Less than 70% of nominal coil voltage

Drop-out Voltage: Greater than 10% of nominal coil voltage

Resistance: See Chart

Operational Characteristics

Timing Value Operate Time: Approx 20 mS
Release Time: Approx 10 mS } at nominal coil voltage

Insulation Characteristics

Dielectric Strength

Contact To Coil: 4500 VRMS

Across Open Contacts: 1000 VRMS

Insulation Resistance: 1000 megohms Min. @ 500 VDC

Environmental Characteristics

Operating: -25°C to +60°C with no icing

Mechanical Life: 2,000,000 operations min

Weight

Std: 23 gram approx.